



IMPAC®

IMPAC® 7000 PRO 7 YEAR WHITE ELASTOMERIC ROOF COATING

Description:

IMPAC® 7000 PRO is an white acrylic elastomeric roof coating highly reflective. Prevents moisture filtrations.

Benefits:

- IMPAC® 7000 PRO is easy to apply.
- This product can give points for LEED Certification.
- Now with better adherence.
- It has the exclusive UV-SHIELD II sun block which provides properties to preserve the whiteness and elasticity of the roof coating.
- 100% ecologic is formulated in an aqueous base without solvents nor environmental harmful components.

Uses:

- IMPAC® 7000 PRO adheres to the most common construction materials, such as concrete, galvanized sheets, fibrocement, bricks, wood, and ducts, among others.
- It can be applied with a paint brush or a brush. Apply on any type of construction such as: institutional buildings and housing, warehouses, industrial facilities, commercial and homes.
- Consider performing a perimetral banding and in critical points with IMPAC® Super Reinforcement Fabric strips.

Recommendations:


Do not apply at temperatures lower than 10°C or higher than 45°C, neither in rainy days nor with a rainfall threat. Do not apply in humid surfaces. Do not apply when relative humidity is higher than 85% as in days or hours with thin fog, breeze, mist, dew, etc. Any sprinkle from the material on skin should be washed with soap and water. Clean tools with water after use them. This product is ready to use, do not add water. Respect the performance.

KEEP OUT OF REACH OF CHILDREN.

Storage:

Store in a cool and dry place, the container must be tightly closed. Do not stow more than three buckets.

Update: June 23/2020. These technical specifications replace any previous one up to this date. Visit our webpage www.impactusa.com where you can find the current version. Subjected to changes without notice.

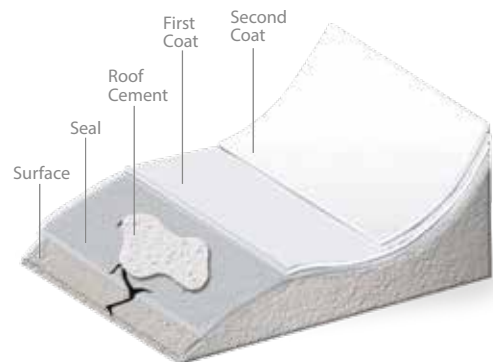

TEST	VALUE	STANDARD
Consistency	Semi-thick	
Density	10.85 – 11.68 lb/gal	ASTM D-1475
Viscosity	30,000 - 35,000 cps	ASTM D-2196
pH	9 - 10	ASTM E-70
Solids	51 ± 2%	ASTM D-1644
Elongation	> 300%	ASTM D-2370
Coverage*	1 m ² / 1 L	
Presentation	3.8 L, 19 L	
Color	White Terracota Red	

*Depends on surface porosity and roughness. Based on two coats.



IMPAC®

LEED:

Product: Impac 7000 White

SS-CREDIT 7 HEAT ISLAND EFFECT: ROOF

SRI Value: 113

CRRC Listing: Yes

Energy Star Listing: Yes

Update: June 23/2020. These technical specifications replace any previous one up to this date. Visit our webpage www.impactusa.com where you can find the current version. Subjected to changes without notice.